


NOTE: FIX ANGLE AND SEAL TO ALL SIDES AND BASE, CLADDING SHALL OVERLAP ANGLE BY 10mm MINIMUM. CONTINUOUSLY SEAL CLADDING AGAINST ANGLE

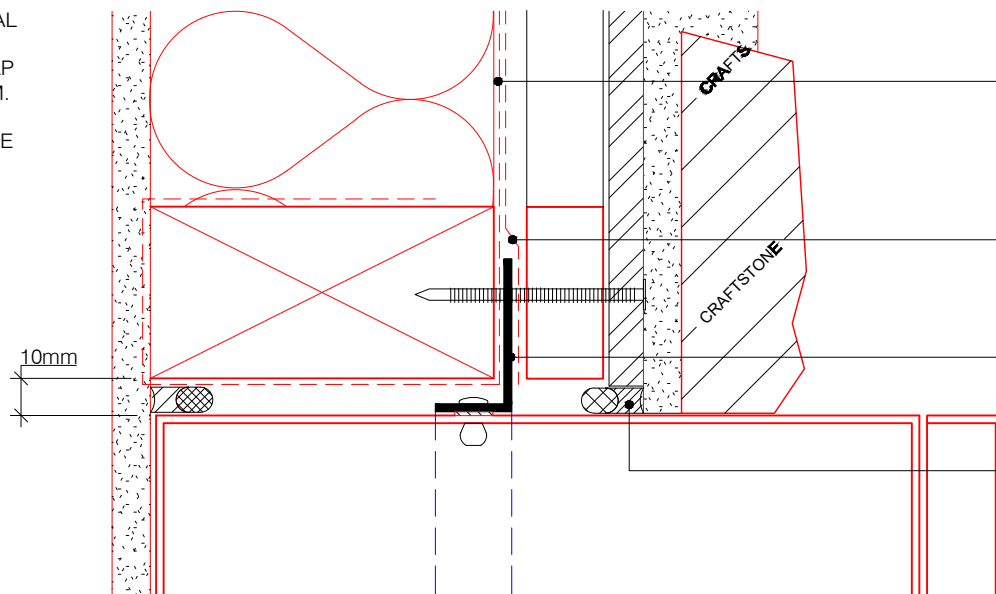


BUILDING UNDERLAY FOLDED INTO OPENING WITH FLEXIBLE FLASHING TAPE CONTINUOUS ALONG SILL, 100mm MIN UP JAMBS AND 50mm ONTO FACE OF UNDERLAY

FLEXIBLE FLASHING TAPE OR ADDITIONAL UNDERLAY JOINING ALUMINIUM ANGLE TO BUILDING UNDERLAY

SEAL AND RIVET 40x20mm ALUMINIUM ANGLE IN BED OF SEALANT ALL ROUND

SEALANT OVER PEF BACKING ROD

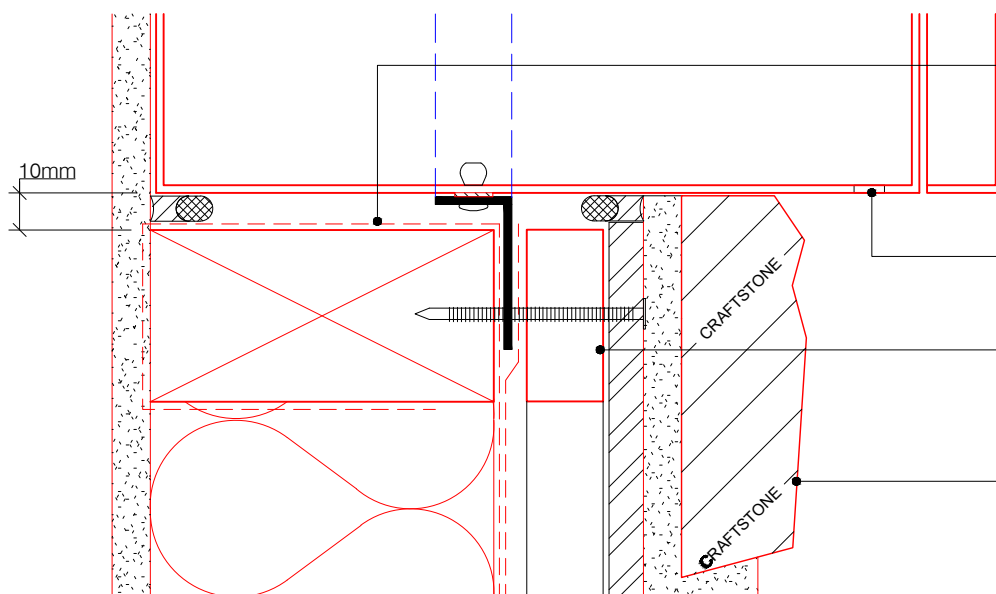

LAP BUILDING UNDERLAY INTO OPENING WITH FLEXIBLE FLASHING TAPE ON ALL CORNERS

METER BOX

3x8mm Ø DRAIN HOLE

CAVITY SYSTEM
TIMBER CAVITY PACKER
MUST BE SET TO A FALL OF 5°

SELECTED CRAFTSTONE
VENEER OVER CRAFTSTONE
ADHESIVE MORTAR ON 9mm
CRAFTSTONE FCB FIXED ACCOR
TO MANUFACTURERS
CONSTRUCTION DETAILS

WWW.CRAFTSTONE.CO.NZ